

**INSTALLATION ARRANGEMENT**

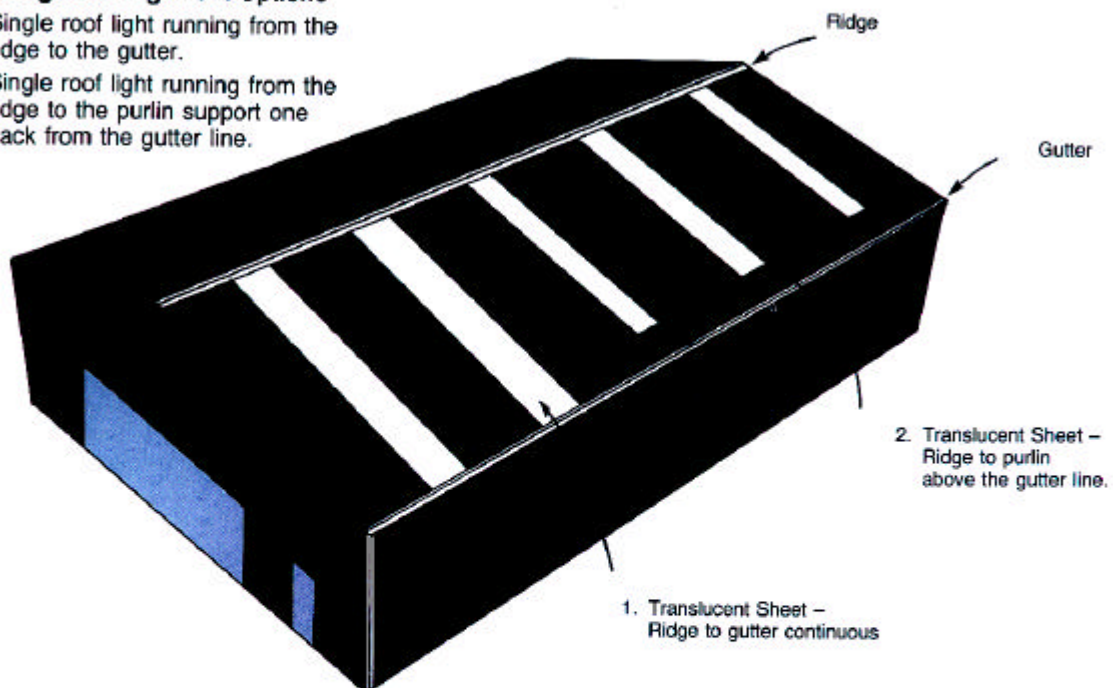
The glass reinforced polyester is required to be supported on both edges when installed in accordance with AS/NZS1562.3:1996, it should be installed in single sheets supported by the main roofing material. Multiple sheets can be used subject to discussion with the Alsynite Technical Department.

**INSTALLATION ARRANGEMENT**

The glass reinforced polyester is required to be supported on both edges when installed in accordance with AS2424, 1991, it should be installed in single sheets supported by the main roofing material. Multiple sheets can sometimes be used subject to discussion with the Alsynite Technical Department.

**Roof Light Arrangement Options**

1. Single roof light running from the ridge to the gutter.
2. Single roof light running from the ridge to the purlin support one back from the gutter line.

**Typical End Lap of Translucent Sheet**